

ALG2

Align is an easily specifiable and highly configurable lighting system designed to accommodate the changing needs of any space. Multi-award winning luminaire system.

Magnetic modules¹ come with multiple light and mounting options. Tool-free installation and removal capabilities.¹

¹ALTA 65 is a non magnetic module.




Performance

LH HIGH			
Distribution	Nominal Lumen Output	DC Load	Efficacy
ALIGN INDIRECT	690 lm/ft	5.8 W/ft	118 lm/W
ALTA 45 - 18°	1,141 lm	13.3 W	85 lm/W
ALTA 45 - 38°	1,083 lm	13.3 W	80 lm/W
ALTA 55 - 25°	1,394 lm	18.2 W	75 lm/W
ALTA 55 - 35°	1,298 lm	18.2 W	70 lm/W
ALTA 65 - 15°	2746 lm	31.0 W	89 lm/W
ALTA 65 - 25°	2739 lm	31.0 W	87 lm/W
ALTA 65 - 42°	2668 lm	31.0 W	72 lm/W
ALTA 65 - 57°	2679 lm	31.0 W	70 lm/W
STRIDE SQ -REGULAR	518 lm/ft	11.1 W/ft	47 lm/W
STRIDE SQ -DROPPED	534 lm/ft	11.1 W/ft	49 lm/W
STRIDE RS -REGULAR	636 lm/ft	11.1 W/ft	58 lm/W
STRIDE RS -DROPPED	655 lm/ft	11.1 W/ft	60 lm/W
PACE 22°	1,367 lm	17 W	80 lm/W
PACE 55°	1,123 lm	17 W	66 lm/W
PACE HE TECH	544 lm	13 W	42 lm/W


LS STANDARD			
Distribution	Nominal Lumen Output	DC Load	Efficacy
ALIGN INDIRECT	346 lm/ft	2.8 W/ft	123 lm/W
ALTA 45 - 18°	570 lm	6.4 W	88 lm/W
ALTA 45 - 38°	936 lm	6.4 W	144 lm/W
ALTA 55 - 25°	871 lm	10.5 W	83 lm/W
ALTA 55 - 35°	857 lm	10.5 W	82 lm/W
ALTA 65 - 15°	2200 lm	24.0 W	93 lm/W
ALTA 65 - 25°	2194 lm	24.0 W	92 lm/W
ALTA 65 - 42°	2137 lm	24.0 W	90 lm/W
ALTA 65 - 57°	2146 lm	24.0 W	90 lm/W
PACE 22°	864 lm	10 W	86 lm/W
PACE 55°	703 lm	10 W	70 lm/W
PACE HE TECH	391 lm	7 W	56 lm/W

Based on static white 3500K. For the complete photometric data of this fixture go to page 7.


Photometric

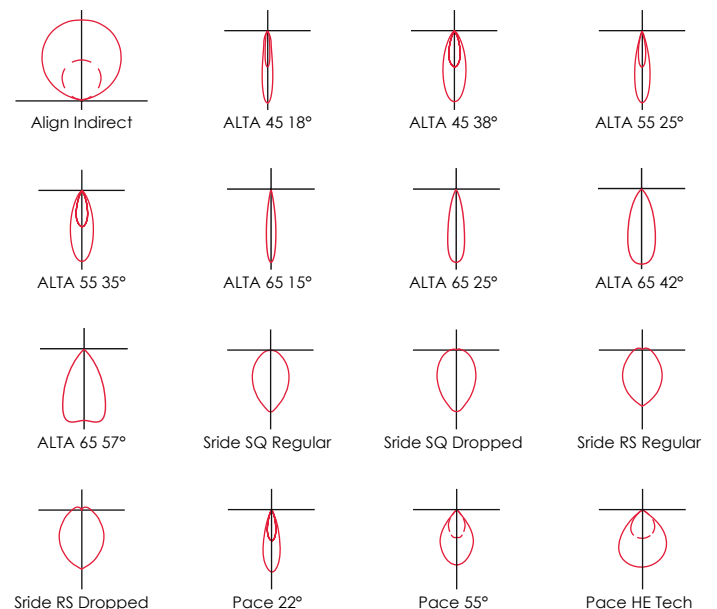


Configurations

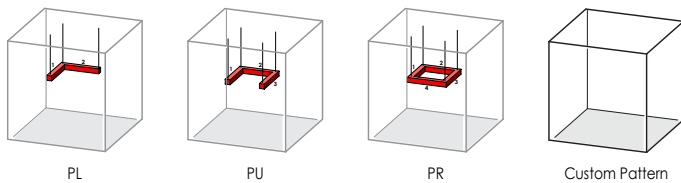

Mounting



Dimensions




Project name

Type

Date

Quantities

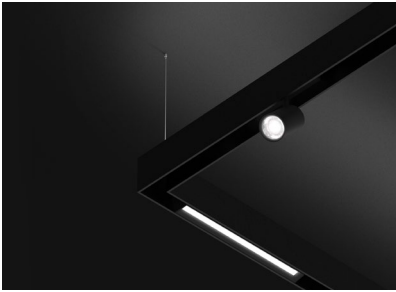

Need help?
Don't see what you need?
We know that having so many options can be overwhelming. Please reach out to our factory for any specific request or questions you have.

Our Design Assist
(designassist@alights.com)
team is here to make the process move smoothly.

ALG2					
SERIES	POWER SOURCE	LENGTH OR PATTERN TYPE	INTERSECTION TYPE	INDIRECT OUTPUT	INDIRECT OPTIC
ALG2	RJ Recessed J-Box with cover plate IJ Profile Integrated J-Box	_ Nominal Length PL "L" Shape ¹ PU "U" Shape ¹ PR Rectangle/Square ¹ CP Custom Pattern ²	IT "T" Intersection IX "X" Intersection	LS Standard Output LH High Output	D Diffused Dust Cover
¹ Specify in feet to the nearest 4 feet (i.e. 6) ² Contact Design Assist					

INDIRECT CCT		CRI		VOLTAGE		MOUNTING		EXTERIOR FINISH ¹		DIMMING		EMERGENCY	
27	2700K	—	CRI 80	U	Universal	S	Aircraft cable	B	Black	D	0-10V Single Control ¹	E	Emergency-battery ¹
30	3000K	CRI	CRI 90+ ¹	120	120V			W	White	DC	0-10V Dual Control ²		
35	3500K												
40	4000K												
<div><div>¹Standard offering is 80+ CRI.</div><div>¹Inside of system is always black.</div><div>¹Contact Design Assist to configure emergency layout.</div></div>													

ALTA 45 MODULES	ALTA 55 MODULES	ALTA 65 MODULES	PACE MODULES ¹
A41SB_ ALTA 45 18° LS Black ¹ A43SB_ ALTA 45 38° LS Black ¹ A41HB_ ALTA 45 18° LH Black ¹ A43HB_ ALTA 45 38° LH Black ¹ A41SW_ ALTA 45 18° LS White ¹ A43SW_ ALTA 45 38° LS White ¹ A41HW_ ALTA 45 18° LH White ¹ A43HW_ ALTA 45 38° LH White ¹	A52SB_ ALTA 55 25° LS Black ¹ A53SB_ ALTA 55 35° LS Black ¹ A52HB_ ALTA 55 25° LH Black ¹ A53HB_ ALTA 55 35° LH Black ¹ A52SW_ ALTA 55 25° LS White ¹ A53SW_ ALTA 55 35° LS White ¹ A52HW_ ALTA 55 25° LH White ¹ A53HW_ ALTA 55 35° LH White ¹	A61SB_ ALTA 65 15° LS Black ¹ A62SB_ ALTA 65 25° LS Black ¹ A64SB_ ALTA 65 42° LS Black ¹ A65SB_ ALTA 65 57° LS Black ¹ A61HB_ ALTA 65 15° LH Black ¹ A62HB_ ALTA 65 25° LH Black ¹ A64HB_ ALTA 65 42° LH Black ¹ A65HB_ ALTA 65 57° LH Black ¹ A61SW_ ALTA 65 15° LS White ¹ A62SW_ ALTA 65 25° LS White ¹ A64SW_ ALTA 65 42° LS White ¹ A65SW_ ALTA 65 57° LS White ¹ A61HW_ ALTA 65 15° LH White ¹ A62HW_ ALTA 65 25° LH White ¹ A64HW_ ALTA 65 42° LH White ¹ A65HW_ ALTA 65 57° LH White ¹	P2S_ Pace 22° LS ² P2H_ Pace 22° LH ² P5S_ Pace 55° LS ² P5H_ Pace 55° LH ² PHS_ Pace HE LS ² PHH_ Pace HE LH ²
¹ Specify quantity (i.e. A41S6). Specify multiple modules if needed. Go to module page for photometric data ² Specify quantity (i.e. A41S6). Specify multiple modules if needed. Go to module page for photometric data ³ Specify quantity (i.e. A41S6). Specify multiple modules if needed. Go to module page for photometric data			

STRIDE MODULES	DIRECT CCT	MODULES CRI
SR1_ Stride Rounded Lens 1 ¹ SR2_ Stride Rounded Lens 2 ¹ SR3_ Stride Rounded Lens 3 ¹ SR4_ Stride Rounded Lens 4 ¹ SS1_ Stride Suared Lens 1 ¹ SS2_ Stride Suared Lens 2 ¹ SS3_ Stride Suared Lens 3 ¹ SS4_ Stride Suared Lens 4 ¹	27 2700K 30 3000K 35 3500K 40 4000K	_ CRI 80 CRI 90+ ¹
Consult factory if longer cable is required		


Recessed J-box: ø9.3" cover plate with recessed driver box. Standard is white. Recessed j-boxes are suitable for many kinds of ceiling and leave more space for accessories in the system.

The profile integrated J-box is 8.3" long at every integrated power segments. It makes it easier to install in the field and requires minimal intervention on the installation environment.

Segment Standard Lengths

DIMENSIONS				
	Nominal 2'	Nominal 4'	Nominal 6'	Nominal 8'
LIGHTED - X	N/A	24.00"	48.00"	72.00"
LIGHTED	12.00"	36.00"	60.00"	84.00"
LH HIGH OUTPUT	705 lm/ft			
LS STANDARD OUTPUT	353 lm/ft			

Segment Standard Lengths

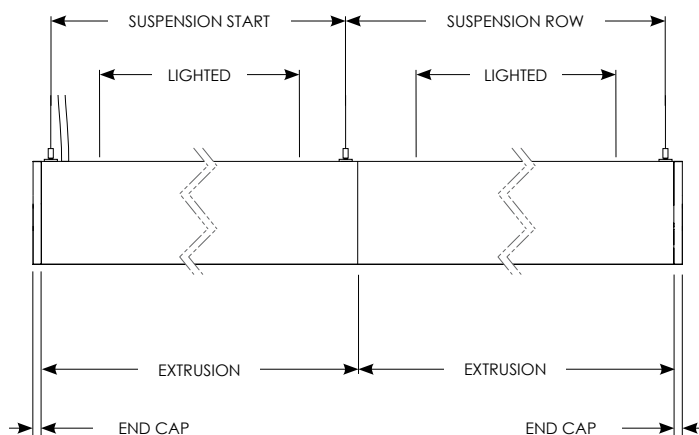

DIMENSIONS		
		Aircraft Cable
Nominal 2'	Suspension Start	23.42"
	Suspension Row	24.00"
	Extrusion	24.00"
Nominal 4'	Suspension Start	47.42"
	Suspension Row	48.00"
	Extrusion	48.00"
Nominal 6'	Suspension Start	71.42"
	Suspension Row	72.00"
	Extrusion	72.00"
Nominal 8'	Suspension Start	95.42"
	Suspension Row	96.00"
	Extrusion	96.00"

End Cap	0.30"
---------	-------

For more information on mounting lengths, go to the aircraft cable mounting length segment on page 6.

Maximum Module Qty. Per Driver

Maximum quantity of modules per driver are calculated by dividing the maximum DC load (100W) by the DC power consumption per module. For example, a maximum of 7 "ALIGN ALTA 45" at high output can be powered by a single power feed: $100W \div 13.5W = 7$ units. A variety of different modules are available and combining several modules is possible and recommended.



Need several power drops for more modules or rows? Have questions? We know that having so many options can be overwhelming. Please reach out to our factory for any specific requests or questions you have. Our talented Design Assist team is here to help.

Output	Module	DC Power	Max Qty.
LH HIGH OUTPUT	PACE (22°-55°)	17.0 W	5
	PACE HE TECH	13.0 W	7
	ALTA 45	13.3 W	7
	ALTA 55	18.2 W	5
	ALTA65	31.0 W	3
	STRIDE (RS - SQ)	11.1 W/ft	8 ft
LS STANDARD OUTPUT	PACE (22°-55°)	10.0 W	10
	PACE HE TECH	7.00 W	14
	ALTA 45	6.4 W	15
	ALTA 55	10.5 W	9
	ALTA 65	24.0 W	3
	STRIDE (RS - SQ)	11.1 W/ft	8 ft

MAGNETIC SYSTEM
ALG
Maximum DC load 100W (per driver)

MAGNETIC SYSTEM											
PACE (22°, 55°)		PACE HE TECH		ALTA 45		ALTA 55		ALTA 65		STRIDE (SQ, RN)	
LH 17.0W	LS 10.0W	LH 13.5W	LS 7.0W	LH 13.3W	LS 6.4W	LH 18.2W	LS 10.2W	LH 31.0W	LS 24.0W	LH 11W/FT	



Here is how you determine if and when you need an extra power source :

1. The total DC load (W) of installed light sources exceeds 100W.
2. The total length of indirect lighting exceeds 24' If your system exceeds either of these conditions (100W or 24'), an additional power source must be added in a M 'mid segment'.

ALTA Performance at 4000K

ALTA 45				ALTA 55				ALTA 65			
Optic	Output	DC Load	Efficacy	Optic	Output	DC Load	Efficacy	Optic	Output	DC Load	Efficacy
18°	LH	13.3W	85 lm/W	25°	LH	18.2W	77 lm/W	15°	LH	31.0W	89 lm/W
	LS	6.4W	90 lm/W		LS	10.5W	86 lm/W		LS	24.0W	93 lm/W
38°	LH	13.3W	85 lm/W	35°	LH	18.2W	75 lm/W	25°	LH	31.0W	87 lm/W
	LS	6.4W	90 lm/W		LS	10.5W	82 lm/W		LS	24.0W	92 lm/W
								42°	LH	31.0W	72 lm/W
									LS	24.0W	90 lm/W
								57°	LH	31.0W	70 lm/W
									LS	24.0W	90 lm/W

Based on static white 4000K. For the complete photometric data of this fixture go to Light Loss Factor table.



To specify your ALTA module's beam angle, output and quantity, please go to the ALG2, ALG3, and ALG5 system pages.
If you have a question or need more information on the possibilities of our modules and systems, please consult our design-assist team.

Light Loss Factor

OUTPUT	CCT	CRI 80+ (STANDARD)								CRI 90+							
		ALTA 45		ALTA 55		ALTA 65				ALTA 45		ALTA 55		ALTA 65			
		18°	38°	25°	35°	15°	25°	42°	57°	18°	38°	25°	35°	15°	25°	42°	57°
LH (high)	4000K	1153 lm	1094 lm	1408 lm	1342 lm	2773 lm	2766 lm	2694 lm	2705 lm	1030 lm	977 lm	1257 lm	1198 lm	2343 lm	2339 lm	2277 lm	2285 lm
	3500K	1141 lm	1083 lm	1394 lm	1329 lm	2746 lm	2739 lm	2668 lm	2679 lm	987 lm	936 lm	1205 lm	1149 lm	1979 lm	1976 lm	1923 lm	1930 lm
	3000K	1115 lm	1058 lm	1362 lm	1298 lm	2692 lm	2685 lm	2616 lm	2626 lm	965 lm	916 lm	1178 lm	1123 lm	2209 lm	2205 lm	2146 lm	2154 lm
	2700K	1080 lm	1025 lm	1319 lm	1257 lm	2585 lm	2578 lm	2511 lm	2521 lm	921 lm	874 lm	1125 lm	1072 lm	2120 lm	2117 lm	2060 lm	2068 lm
LS (standard)	4000K	576 lm	977 lm	880 lm	866 lm	2222 lm	2216 lm	2158 lm	2167 lm	514 lm	514 lm	786 lm	773 lm	1877 lm	1874 lm	1825 lm	1830 lm
	3500K	570 lm	936 lm	871 lm	857 lm	2200 lm	2194 lm	2137 lm	2146 lm	493 lm	493 lm	753 lm	741 lm	1585 lm	1583 lm	1542 lm	1546 lm
	3000K	557 lm	916 lm	851 lm	837 lm	2157 lm	2151 lm	2095 lm	2104 lm	482 lm	482 lm	737 lm	725 lm	1769 lm	1766 lm	1720 lm	1725 lm
	2700K	540 lm	874 lm	825 lm	811 lm	2071 lm	2065 lm	2011 lm	2020 lm	460 lm	460 lm	703 lm	692 lm	1698 lm	1696 lm	1651 lm	1656 lm

ALTA Photometric Data

Distribution

Direct Symmetric

Output

ALTA 45
LH High output 13.3W
LS Standard output 6.4W

ALTA 55
LH High output 18.2W
LS Standard output 10.5W

ALTA 65
LH High output 31.0W
LS Standard output 24.0W


ALTA 45 Photometric Data

18° DIRECT SYMMETRIC

LH - 4000K

Lumens: 1135 lm
Input watts: 13.3 W
Efficacy: 85 lm/W

LH ———
LS - - - - -




38° DIRECT SYMMETRIC

LH - 4000K

Lumens: 1094 lm
Input watts: 13.3 W
Efficacy: 85 lm/W

LH ———
LS - - - - -




ALTA 55 Photometric Data

25° DIRECT SYMMETRIC

LH - 4000K

Lumens: 1408 lm
Input watts: 18.2 W
Efficacy: 77 lm/W

LH ———
LS - - - - -




35° DIRECT SYMMETRIC

LH - 4000K

Lumens: 1342 lm
Input watts: 18.2 W
Efficacy: 77 lm/W

LH ———
LS - - - - -




ALTA 65 Photometric Data

15° DIRECT SYMMETRIC

LH - 4000K


Lumens: 2746 lm
Input watts: 31.0 W
Efficacy: 89 lm/W



25° DIRECT SYMMETRIC

LH - 4000K


Lumens: 2739 lm
Input watts: 31.0 W
Efficacy: 88 lm/W



42° DIRECT SYMMETRIC

LH - 4000K


Lumens: 2667 lm
Input watts: 31.0 W
Efficacy: 86 lm/W



57° DIRECT SYMMETRIC


LH - 4000K

Lumens: 2678 lm
Input watts: 31.0 W
Efficacy: 86 lm/W




ALTA Dimmentions


ALTA 45

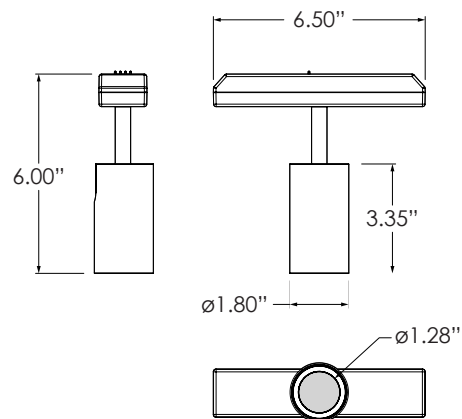

ALTA 55

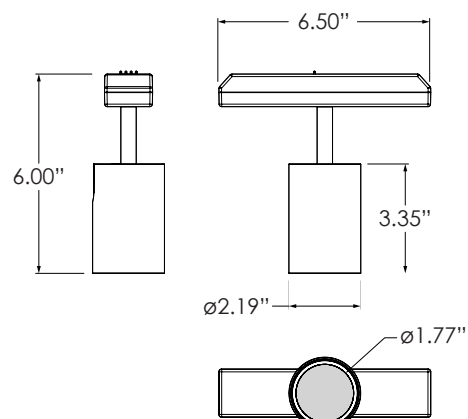

ALTA 65

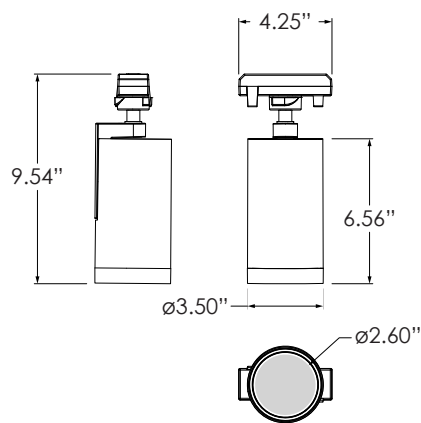

Stride Performance

Optic	POSITION	DC LOAD	EFFICACY
SQ	Regular	11.1 W/ft	46 lm/W
	Dropped	11.1 W/ft	47 lm/W
RS	Regular	11.1 W/ft	57 lm/W
	Dropped	11.1 W/ft	58 lm/W

Based on static white 4000K. For the complete photometric data of this fixture go to Light Loss Factor table.



Light Loss Factor

OUTPUT	CCT	CRI 80+ (STANDARD)				CRI 90+			
		SQ		RS		SQ		RS	
		Regular	Dropped	Regular	Dropped	Regular	Dropped	Regular	Dropped
LH (high)	4000K	529 lm/ft	545 lm/ft	650 lm/ft	669 lm/ft	467 lm/ft	481 lm/ft	574 lm/ft	591 lm/ft
	3500K	518 lm/ft	534 lm/ft	636 lm/ft	655 lm/ft	452 lm/ft	465 lm/ft	555 lm/ft	571 lm/ft
	3000K	498 lm/ft	513 lm/ft	612 lm/ft	630 lm/ft	427 lm/ft	440 lm/ft	525 lm/ft	540 lm/ft
	2700K	479 lm/ft	494 lm/ft	589 lm/ft	606 lm/ft	405 lm/ft	417 lm/ft	497 lm/ft	512 lm/ft

Stride Photometric Data

Distribution

Direct Symmetric


Output

LH High output 11.1W/ft

SQ Lens Photometric Data


SQ DIRECT SYMMETRIC
LH - 4000K

Lumens: 529 lm/ft
Input watts: 11.1 W/ft
Efficacy: 46 lm/W



SQ DIRECT SYMMETRIC DROP LENS
LH - 4000K


Lumens: 545 lm/ft
Input watts: 11.1 W/ft
Efficacy: 47 lm/W



RS Lens Photometric Data


RS DIRECT SYMMETRIC
LH - 4000K

Lumens: 650 lm/ft
Input watts: 11.1 W/ft
Efficacy: 57 lm/W





RS DIRECT SYMMETRIC DROP LENS
LH - 4000K

Lumens: 669 lm/ft
Input watts: 11.1 W/ft
Efficacy: 58 lm/W



Stride Dimmensions

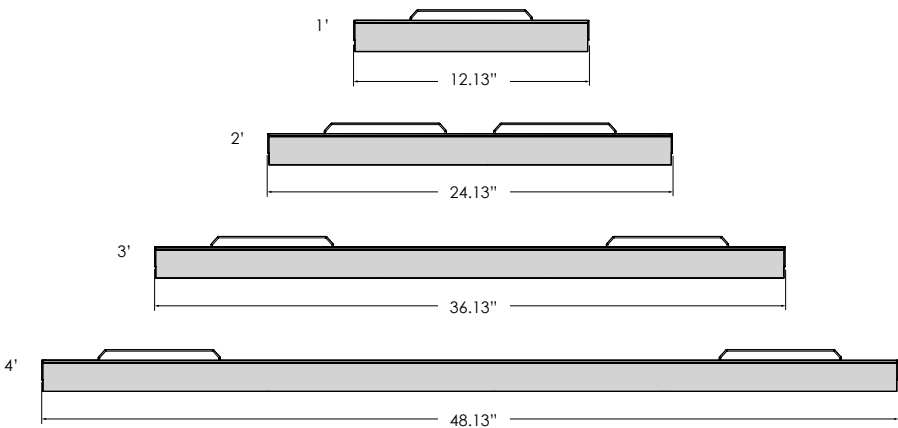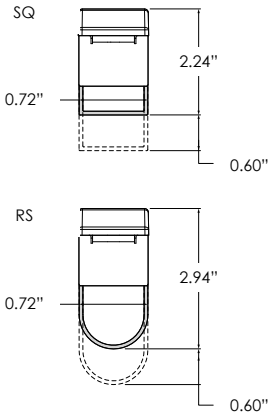

Pace Performance

Optic	OUTPUT	DC LOAD	EFFICACY
22°	LH	17.00 W	85 lm/W
	LS	10.00W	91 lm/W
55°	LH	17.00 W	67 lm/W
	LS	10.00 W	74 lm/W
HE TECH	LH	13.50 W	43 lm/W
	LS	7.00 W	48 lm/W

Based on static white 4000K. For the complete photometric data of this fixture go to Light Loss Factor table.



Baffled Optic
22 degrees



Baffled Optic
55 degrees



HE Tech™

Light Loss Factor

OUTPUT	CCT	CRI 80+			CRI 90+		
		22°	55°	HE TECH	22°	55°	HE TECH
LH (high)	4000K	1,429 lm	1,174 lm	556 lm	1,163 lm	956 lm	491 lm
	3500K	1,367 lm	1,123 lm	544 lm	1,105 lm	908 lm	475 lm
	3000K	1,320 lm	1,085 lm	524 lm	1,053 lm	865 lm	449 lm
	2700K	1,297 lm	1,065 lm	504 lm	989 lm	813 lm	425 lm
LS (standard)	4000K	903 lm	735 lm	399 lm	735 lm	598 lm	352 lm
	3500K	864 lm	703 lm	391 lm	698 lm	568 lm	341 lm
	3000K	834 lm	679 lm	376 lm	665 lm	542 lm	322 lm
	2700K	819 lm	667 lm	361 lm	625 lm	509 lm	305 lm

Pace Photometric Data

Distribution

Direct Symmetric

Output


22°-55°
LH High output 17.0W
LS Standard output 10.0W/ft

HE Tech™
LH High output 13.5W/ft
LS Standard output 7.0W/ft

22° DIRECT ASYMMETRIC
LH - 4000K

Lumens: 1429 lm
Input watts: 17.0 W/ft
Efficacy: 85 lm/W


LH
LS



55° DIRECT ASYMMETRIC
LH - 4000K

Lumens: 1174 lm/ft
Input watts: 17.0 W/ft
Efficacy: 67 lm/W


LH
LS



HE TECH DIRECT ASYMMETRIC
LH - 4000K

Lumens: 556 lm/ft
Input watts: 13.5 W/ft
Efficacy: 43 lm/W

LH
LS



Project name


Type

Date


Quantities

Pace Dimmensions

PACE 22°-55°

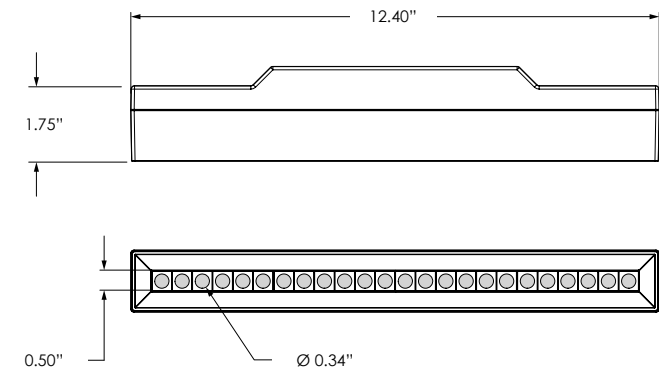

PACE HE

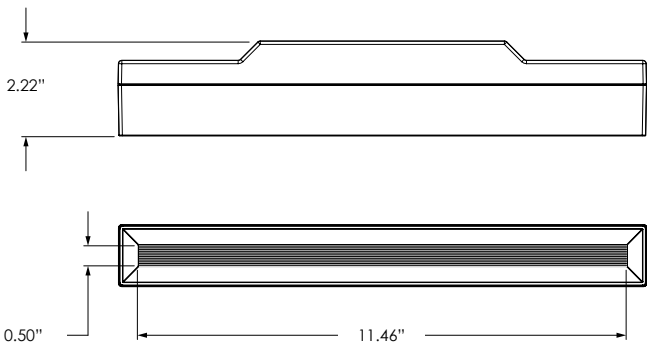

Pattern Typical Segment Breakdown

This section is to detail how each linear runs of your pattern will be divided in standard length segments.

To validate your runs and optimize your pattern and driver placements and configurations, please ask the factory for the detailed segment specsheets or contact our Design Assist team.

Run Length	Segments breakdown
2'- 4'- 6'- 8'	Single segment
10'	6' + 4'
12'	6' + 6'
14'	8' + 6'
16'	8' + 8'
18'	6' + 6' + 6'
20'	6' + 8' + 6'
22'	8' + 6' + 8'
24'	8' + 8' + 8'

Run Length	Segments breakdown
26'	8' + 4' + 6' + 8'
28'	8' + 6' + 6' + 8'
30'	8' + 6' + 8' + 8'
32'	8' + 8' + 8' + 8'
34'	8' + 8' + 4' + 6' + 8'
36'	8' + 8' + 4' + 8' + 8'
38'	8' + 8' + 6' + 8' + 8'
40'	8' + 8' + 8' + 8' + 8'
42'	8' + 8' + 4' + 6' + 8' + 8'
44'	8' + 8' + 6' + 6' + 8' + 8'
46'	8' + 8' + 8' + 6' + 8' + 8'
48'	8' + 8' + 8' + 8' + 8' + 8'
50'	8' + 8' + 8' + 4' + 6' + 8' + 8'
52'	8' + 8' + 8' + 6' + 6' + 8' + 8'
54'	8' + 8' + 8' + 8' + 6' + 8' + 8'
56'	8' + 8' + 8' + 8' + 8' + 8' + 8'
58'	8' + 8' + 8' + 4' + 6' + 8' + 8' + 8'

Run Length	Segments breakdown
60'	8' + 8' + 8' + 6' + 6' + 8' + 8' + 8'
62'	8' + 8' + 8' + 8' + 6' + 8' + 8' + 8'
64'	8' + 8' + 8' + 8' + 8' + 8' + 8' + 8'
66'	8' + 8' + 8' + 8' + 4' + 6' + 8' + 8' + 8'
68'	8' + 8' + 8' + 8' + 6' + 6' + 8' + 8' + 8'
70'	8' + 8' + 8' + 8' + 8' + 6' + 8' + 8' + 8'
72'	8' + 8' + 8' + 8' + 8' + 8' + 8' + 8' + 8'
74'	8' + 8' + 8' + 8' + 4' + 6' + 8' + 8' + 8' + 8'
76'	8' + 8' + 8' + 8' + 6' + 6' + 8' + 8' + 8' + 8'
78'	8' + 8' + 8' + 8' + 8' + 6' + 8' + 8' + 8' + 8'


Available Space In Segments

This section is to detail how much space there is available in each segment for modules. To the right you will see the available space and the length each module occupies in the segment once installed.

Segment length	With integral power supplies (8.30")	With recessed power feed (3.87")
2' (24.00")	15.70"	20.13"
4' (48.00")	39.70"	44.13"
6' (72.00")	63.70"	68.13"
8' (96.00")	87.70"	92.13"

Module	Length occupied in segment
Alta 65	4.25"
Alta 45-55	6.50"
Pace 22-55-HE	12.40"
Stride 1'-2'-3'-4'	12.13" - 24.13" - 36.13" - 48.13"

Component Dimensions

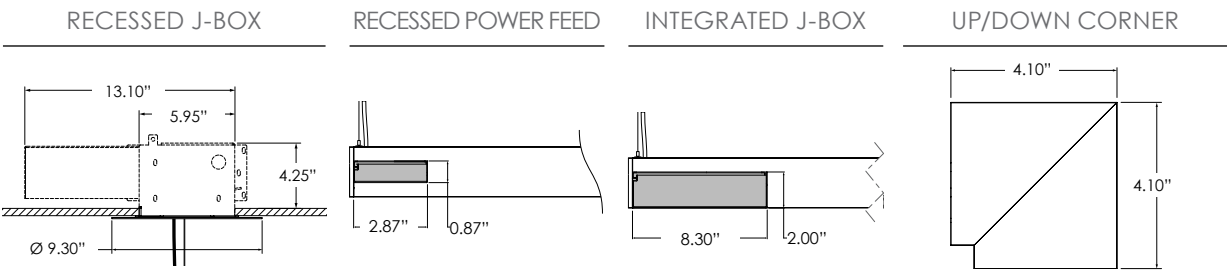

Recessed j-box depth: 5.95"

Align Photometric Data

Distribution

Indirect Symmetric

Output

LH High output 5.8W/ft


LS Standard output 2.8W/ft

ALIGN INDIRECT PHOTOMETRIC DATA

INDIRECT SYMMETRIC
LH - 4000K

Lumens: 705 lm/ft
Input watts: 5.8W/ft
Efficacy: 121lm/W

LH
LS



Light Loss Factor

OUTPUT	CCT	CRI 80+	CRI 90+
LH (high)	4000K	705 lm/ft	623 lm/ft
	3500K	690 lm/ft	602 lm/ft
	3000K	664lm/ft	569 lm/ft
	2700K	639lm/ft	539 lm/ft
LS (standard)	4000K	353 lm/ft	312 lm/ft
	3500K	346 lm/ft	301 lm/ft
	3000K	333 lm/ft	285 lm/ft
	2700K	320 lm/ft	270 lm/ft


Patterns

NOMINAL EXTRUSION DIMENSIONS	
	SUSPENDED
NOMINAL 2'	24.00"
NOMINAL 4'	48.00"
NOMINAL 6'	72.00"
NOMINAL 8'	96.00"


Dimensions are always calculated from the center of the aircraft cable

Refer to aircraft cable installation sheet to properly install your mounting points

Refer to shop drawings for exact segment dimensions

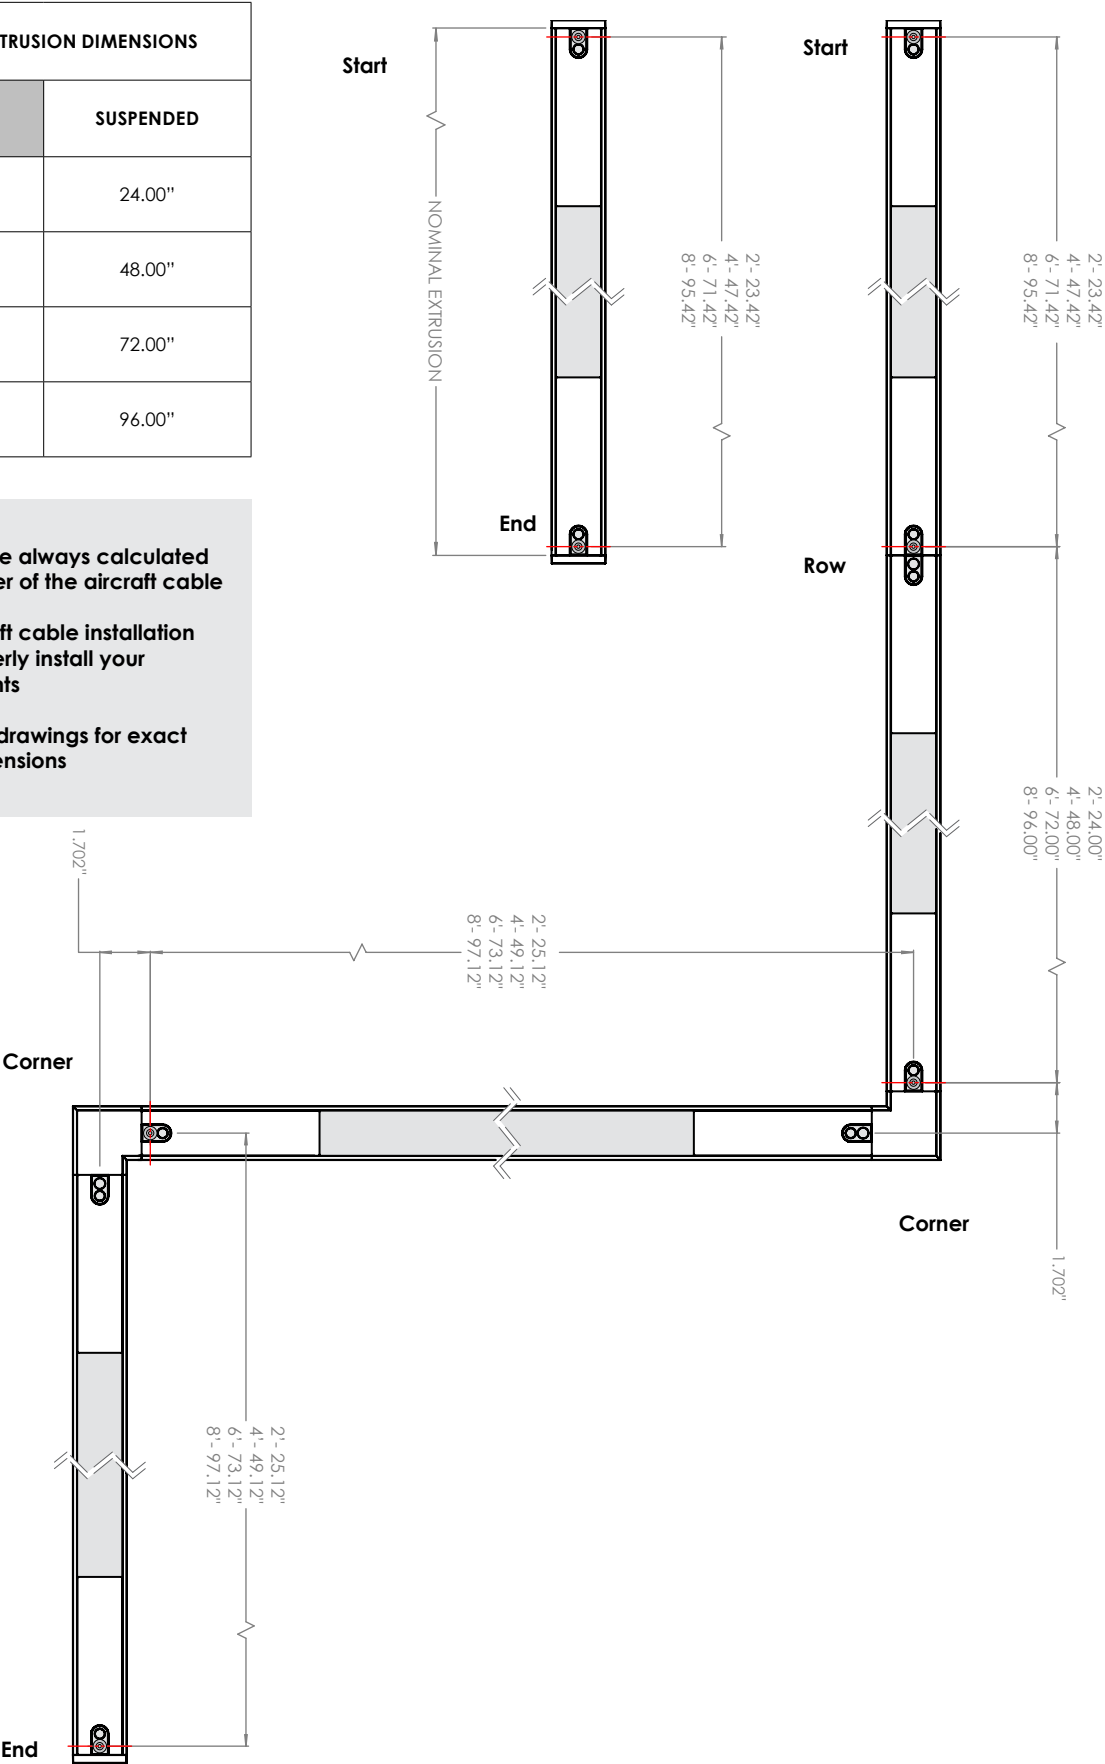

Pattern Sketch Grid

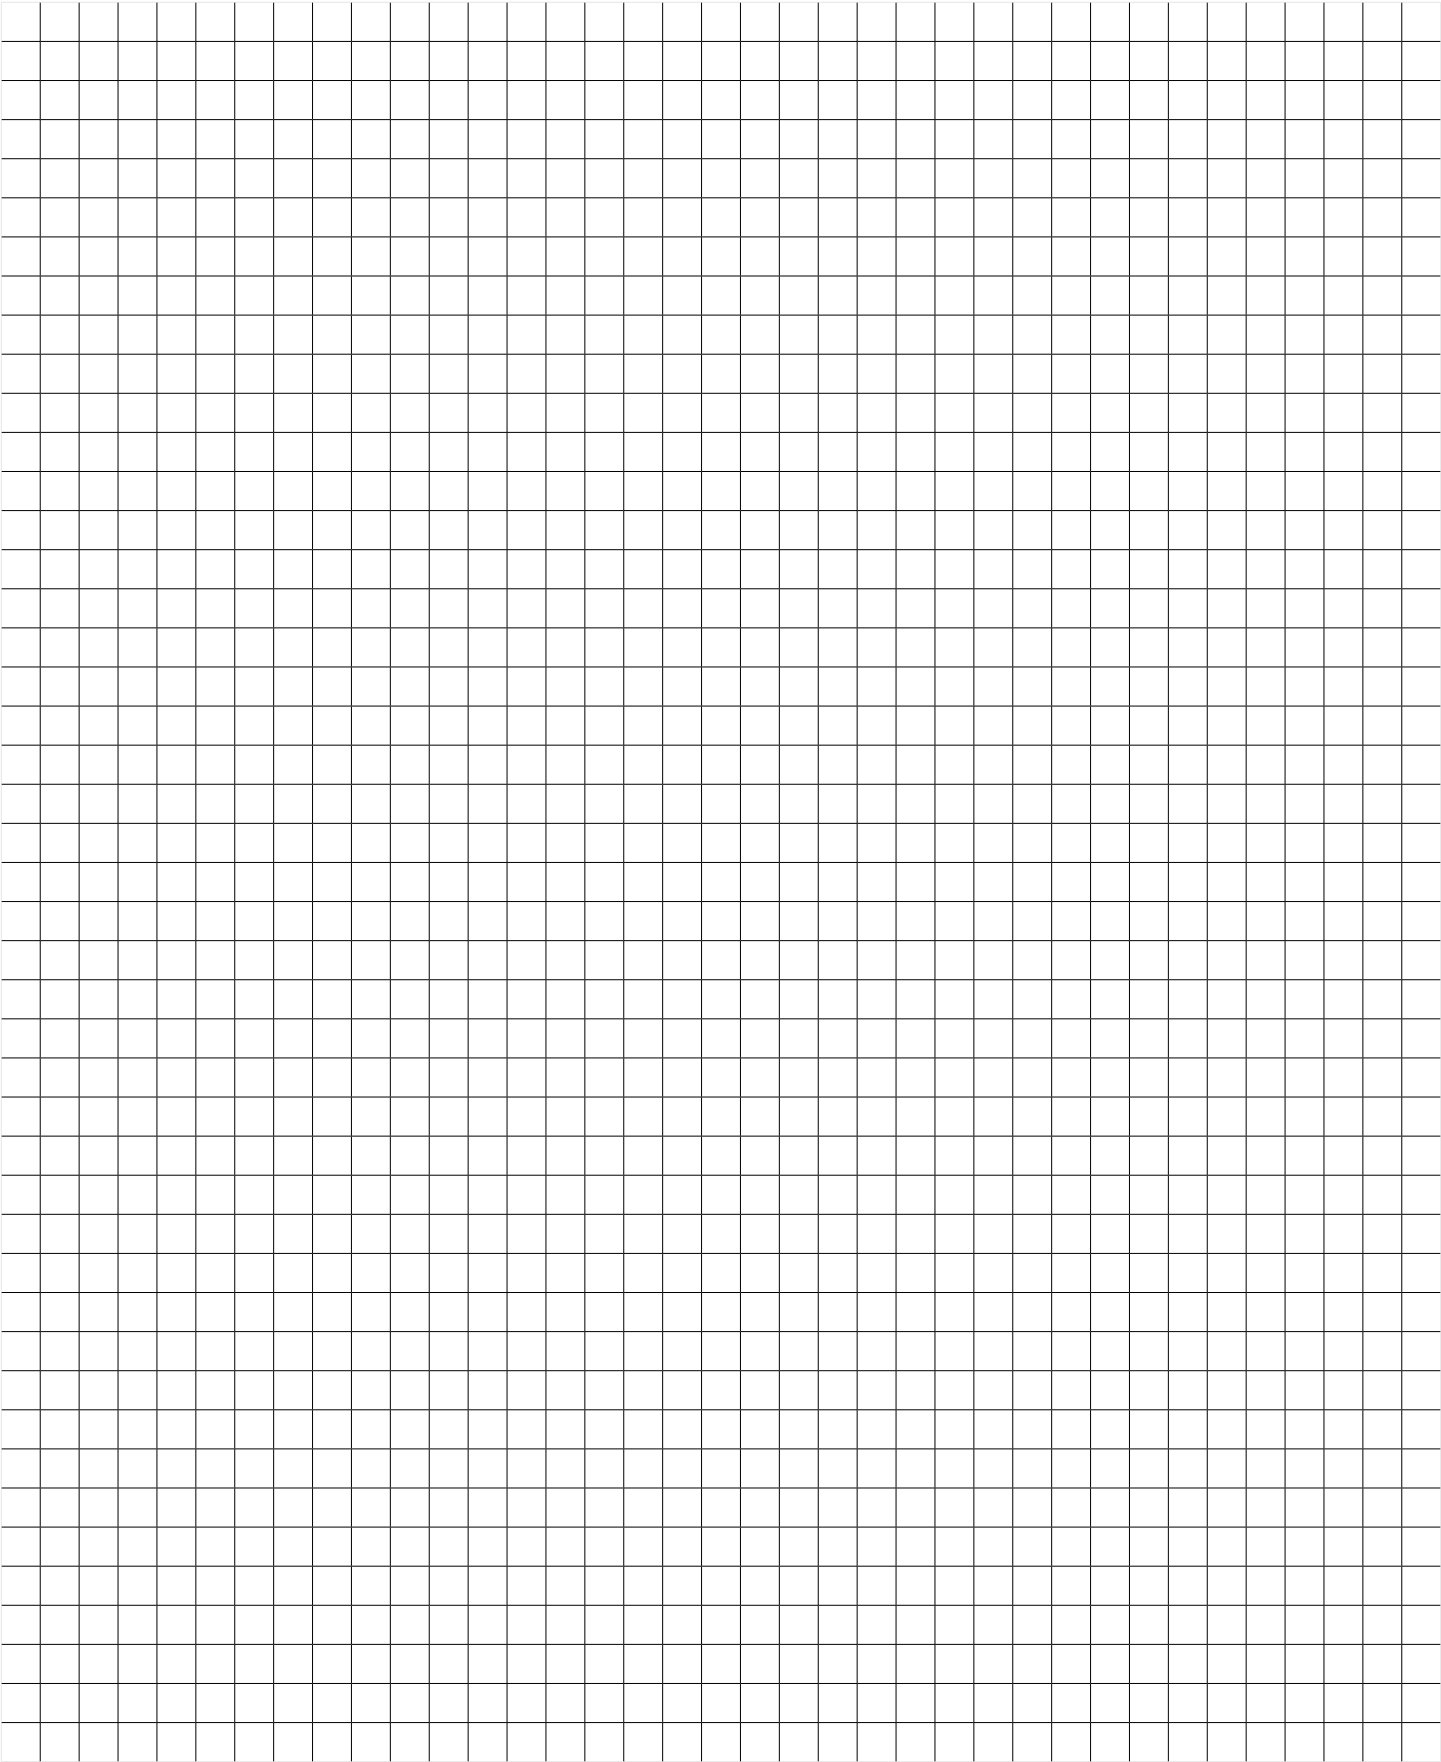

LINEAR DIMENSIONS

Align 2 - Nominal length in increments of 6 inches available as individual fixtures or joined to create continuous tracks (except for IX intersection type, where the minimum fixture length is 48 inches), minimum fixture length is 12 inches.

Alta 65 - Linear length of module is 4.25"

Alta 45-55 - Linear length of module is 6.50"

Pace - All pace modules are 12.40" long.

Stride - Stride is offered in 1', 2', 3' and 4' nominal length. Consult the factory for custom solutions.

OPTICS

Alta 65 - This Alta projector offers each beam angles Spot (15°), Narrow Flood (25°), Flood (42°) & Wide Flood (57°)

Alta 45-55 - Both Alta projectors offer one narrow and one wide beam angle.

Pace - Precise 0.5" baffled optics offer precise regressed lighting with a 22°,55° beam angle and A-light's proprietary HE Tech™ for a softer lambertian illumination.

Stride - Beautifully evenly diffused lens offered in 2 shapes, rounded and square, that can be dropped by half an inch on site without any tools.

Indirect - Diffuse dust cover for a wide lambertian distribution.

LED LIGHT SOURCE

All LEDs in this system are Nichia® LED combined with a performance driven heat sink technology. Tested in accordance with LM79 and LM-80; L70>60,000hr; operated at reduced output for high efficacy and lumen maintenance. 2700K, 3000K, 3500K, and 4000K with 80+ CRI standard; other color temperatures and 90+ CRI available upon request, contact factory. LED color variation maintained at a 3-step MacAdam ellipse (SDCM 3x). LEDs are available in Standard, and High outputs. Refer to photometry for delivered lumens.

LED DRIVER

Standard 48V constant voltage universal 120-277V electronic driver provide power to DC to DC drivers that control the individual light sources Max Driver life of 50,000 hrs with ambient operating temperature range of -20°C to 70°C, maximum case temperature of 90°C. Electrical specifications at maximum driver load: PF >0.90, THD <2.0%, 92% Efficiency. If the maximum load of 100W on a single driver is exceeded, performance issues might occur. If you have questions, contact our Design Assist team.

DIMMING CONTROLS

0-10V - The DC to DC drivers in each direct modules and indirect segment provide standard 0-10V dimming. Each Direct module can be individually tuned to set max output using graded potentiometer on top of fixtures.

EMERGENCY

This luminaire is available with a LED emergency lighting battery pack for both normal and emergency operation, 120-277v only. This emergency pack contains long-life Ni-Cad recyclable battery, 24 hour charger, and converter circuit. Test switch and charge indicator provided. Test button to be remote located within 3 feet of the luminaire, by others in accordance with local code. Emergency mode provides constant power to a nominal 10W Indirect LED load for a period of 90 minutes. Please consult the factory for emergency configuration assistance. Our talented Design Assist team is always available for collaboration and specification support. *Emergency option only offered for the indirect output of the system.

MOUNTING

Pendant - Suspension with aircraft cables. Aircraft cable set includes 48" standard length 1/16" stainless steel adjustable aircraft cables with secure micro grippers to field set suspension length, comes factory installed in fixture. 4-1/2" x 4-1/2" square white canopies. Cord strain also included.

STRUCTURE

Robust, high quality 60% recycled aluminum extruded housing. 0.040" thick aluminum internal gear trays. Flat or flanged aluminum end caps. Aluminum joiner brackets. 4 lbs/ft approximate fixture weight.

FINISH

Electro-statically applied powder coat finish. Standard finish options include white and black, except on the Pace modules which is only available in black.

LISTING

UL/CUL rated for Damp Locations. Tested in accordance with UL 1598 and certified to CEC/CSA C22.1, NEC, ANSI/NFPA 70, and NOM-001-SEDE.

WARRANTY

Limited defect-free manufactured equipment warranty provided under normal use and proper storage for a period of one (1) year. LED products (LED boards and drivers) will be covered for a period of five (5) years. Please refer to full terms and conditions on our website.